**Exhaust Type Tumble Dryer** 

**User's Manual** 

HDM8.0-61

- Please read this manual carefully before using.
- Retain it for future reference.




### **Contents**


| Specificationinside front cov | er |
|-------------------------------|----|
| Names Of The Parts            | 1  |
| Important Safety Instructions | 2  |
| Operation Cautions            | .4 |
| Installation Instructions     | 5  |
| Using Method                  | 6  |
| Care And Cleaning             | 9  |
| Trouble Shooting              | 10 |

# **Specification**

| Rated Voltage • Frequency | 220V •~50Hz              |  |  |
|---------------------------|--------------------------|--|--|
| Rated Input Power         | Extra: 1100W Light: 700W |  |  |
| Rated Fuse Current        | 10A                      |  |  |
| Rated Max. Capacity       | 5.0kg                    |  |  |
| Overall Dimension         | 630mm×515mm×685mm        |  |  |
| Net Weight                | 27kg                     |  |  |

### **Names Of The Parts**

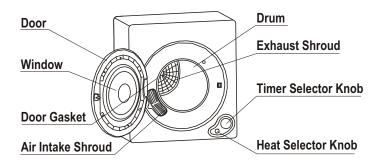



- Please check if the power receptacle has good earthing Condition before using to guarantee your safety.
- The manufacturer will not take responsibility for those Risks occurred from not obeying this manual.

# Important Safety Instructions

Warning-To reduce the risk of fire ,electric shock, or injury to persons when using your appliance, follow basic precautions, including the following:

- 1.Read all instructions before using the appliance.
- 2. The tumble dryer is not to be used if chemicals have been used for cleaning.
- 3. The tumble dryer is intended only for drying textile material washed in water.
- 4. There has to be adequate ventilation to avoid the back flow of gases into the room from appliances burning other fuels including open fires, when operating the tumble dryer.
- 5. The lint trap is to be cleaned frequently.
- 6.Lint is not to be allowed to accumulate around the tumble dryer.
- 7. For appliances with ventilation openings in the base, that a carpet must not obstruct the openings.
- 8.Exhaust air must not be discharged into a flue which is used for exhausting fumes from appliances burning gas or other fuels.
- 9.Do not dry articles that have been previously cleaned in, washed in, socked in, or spotted with gasoline, dry-cleaning solvents, or other flammable or explosive substances, as they give off vapors that could ignite or explode.
- 10.Do not place items exposed to cooking oils in your dryer. Items contaminated with cooking oils may contribute to a chemical reaction that could cause a load to catch fire.
- 11. Fabric softeners or similar products should not be used in a tumble dryer to eliminate the effects of static electricity unless this practice is specifically recommended by the manufacturer of the fabric softener or product.
- 12.Do not use heat to dry articles containing foam rubber or similarly textured rubber-like materials.
- 13.Do not allow children to play on, climb on or in the appliance. Close supervision of children is necessary when the appliance is used near children.
- 14.Before the appliance is removed from service or discarded, remove the door to the drying compartment.
- 15.Keep your dryer away from combustible materials (such as gasoline) during operation to prevent the risk of fire.
- 16.Do not use or place stove, gas device, water heater, tinder or similarities close to your dryer. Do not install or store this appliance where it will be exposed to water and/or to the weather.

## **Important Safety Instructions**

- 17.Do not tamper with controls.
- 18.Do not repair or replace any part of the appliance or attempt any servicing unless specifically recommended in the user-maintenance instructions or in published user-repair instructions that you understand and have skills to carry out.
- 19. Keep area around the exhaust opening and adjacent surrounding areas free from the accumulation of lint, dust and dirt.
- 20.If material has been used with any flammable liquids or solids it should not be used in the dryer until all traces of the flammable liquids and its fumes have been removed.
- 21. This dryer shall be connected to a three-wire, single phase, 220V AC power receptacle more than 10A, which must be reliably grounded. A leakage protector shall be used, if possible.
- 22.Do not share a receptacle with other appliances. Do not use it when a plug loosely inserted into a receptacle.
- 23.Do not excessively bend, stretch, twist, bind power cord or put heavy stuff on it. Keep the terminator of power cord clean. Carefully clean it with dry cloth if dusts accumulated. If damaged, power cord or plug must be replaced by our service agent or qualified after-sale service person to avoid the risk of danger.
- 24. When normally using, the power cord of dryer shall be easily plugged or unplugged by hand. It must be unplugged during power blackout, moving, not in use or cleaning. Do not plug or unplug the power cord with wet hands.
- 25.Always disconnect dryer from electrical supply before attempting any service. Disconnect power cord by grasping the plug, not the cord.
- 26.Do not block the exhaust vent when dryer operating to prevent it from overheating or other dangers.
- 27.Do not let your dryer operate on packing foam. Otherwise it maybe cause fire since heat accumulation or other external factors.
- 28. Only place sufficiently dehydrated clothes into your dryer for drying to prevent leakage and longer drying time.
- 29.Do not place washed wet clothes in your dryer for a long time not drying them (which may result in water leakage).
- 30.Don't touch the intake for the high temperature during the drying cycle.
- 31.Do not exceed dryer rated Max. Capacity.
- 32. The appliance must not be installed behind a lockable door, a sliding door or a door with a hinge on the opposite side to that of the tumble dryer.

### **Operation Cautions**

### Clothes with ribbon or lace should be dried in a nylon net

 Put chemical fiber and/or clothes with ribbon or lace into a nylon net before drying.

#### Clothes with zipper

 Dry this kind of clothes with zipper zipped or fastener buckled and inside out (to reduce the impact noise between metal and the drum)

## Do not load your dryer when it is running.

 Loading the dryer when it is running shall be avoided to prevent the clothes overdried or incompletely dried.

Please flip clothes over manually from time to time, if necessary, when drying large ones.

 It is noteasy to flipover large clothes (such as overcoat) in the drum, uneven drying therefore happens sometimes.
 If necessary, flip them over manually from time to time to make them dried completely.




Flip over clothes


Avoid to dry starched clothes in your dryer to prevent link filter from clogging, which may lead to bad exhaust performance.

#### Put rumpled clothes in order

 Put all clothes in order after dehydrated before drying them.



 Decrease capacity to get good antiwrinkle result (the capacity shall be 4/5 of that of normal clothes).



 Remove the clothes out of your dryer as early as possible to reduce rumples.



nang the easily crumpled clothe

 Please hang the easily crumpled clothes up with a hanger after dried




### **Installation Instructions**

For your safety and correct using your dryer, please observe all the instructions in this manual toinstall and adjust your dryer.

### Location of your dryer


- Dryer should be located in a dry and well-vented place, not filled with moisture and vapors and where rain cannot reach (like bathroom, open balcony and water faucet).
   Do not locate your dryer in a place where sunlight directly shines.
- Do not use stove, gas etc. near your dryer to avoid dangers.
- Locate your dryer on horizontal solid ground, floor or a special bracket to prevent vibration and noise. Keep a dista nce of 10cm-15cm away from the rear wall when installing.
- The dryer has air intake and exhaust cycles, which needs good air-exhaust vent in the rear and well-vented room. If used in a small space, air exchange fan or exhaust duct can be installed at the vent to exhaust hot wet air outdoors. The length of exhaust duct shall not exceed 2m.



ППП

### Install and use the fixed legs of your dryer


 If the dryer is not used with bracket, take fixed legs out of the accessory bag and screw them into the assembly hole of the dryer to ensure it be placed stable.



### **Using Method**

### 1. Plug the power cord

 The appliance shall be supplied with 220V, 50Hz, connected to a special receptacle more than 10A (reliably grounded).



### 2. Place the dehydrated clothes in your dryer

- Check the following items before putting clothes in.
   They shall be loaded in such a way that 2-3 pieces each time and not in a group to avoid tangling, which is not easy to turn it over resulting in uneven drying since the clothes were wrapped.
- Please put clothes into the drum. Avoid clothes being pressed by the door due to exposure out of the port, which will cause clothes entangle and door gasket release and consequently poor drying effect.



### Before drying your clothes

Make sure if clothes have any special requirements and suitable for drying.
 Do not dry your clothes in your dryer if the materials of which cannot be dried in a dryer or they bear the following labels:











Do not tumble dry

Hang to dry

Drip dry

Dry flat

Dry in the shade

 Carefully check the clothes to be dried and remove combustible material such as lighter and match as well as sharp metal items like coin, hair clip and safety pin maybe mixed with the clothes and in pockets.



- Clothes with zipper or fastener shall be put into your dryer inside out with zipper zipped and fastener buckled.
- Separate dark and light colored items, like you do for washing.
   Check for stains that may not have been removed in washing.
   Dryer heat may permanently set some stains. Properly dried clothes will need minimum of care when removed from dryer.



 For optimum results, use dryer load of similar fabric, weight and construction. Place small items in a mesh bag prevent from tangling. Do not overload the dryer. An average load will fill up half the drum.

### **Using Method**

### 3. Control panel and its functions

#### Heat Selector Knob

Select drying level according to the material, quantity and drying requirements of the clothes to be dried as shown in the figure

- Select 'Strong Dry' for clothes particularly thick and in large quantities or in lower room temperature.
- Select 'Soft Dry' for clothes not resistant to heat (like nylon and chemical fibre).



Soft

Strong

**Heat Selector Knob** 

### **Drying Timer Knob**

 Select dry program according to clothes materials and quantity, turn the timer knob to relative position.

#### Air drying Cooling OFF Power off when the For down, sweater, Motor keeps running after dryer time heating finished while heater stops mohair, cotton sweater timer knob in and cotton-padded working and coldair into the drum to 'OFF' position. clothes needing cool laundry. The whole cooling will be The dryer starts freshening, tumbles finished once the timer knob gets to when turn the knob without heat. Also can 'OFF' position. clockwise. be individually used for clothes long time in closet with the same results. Cooling Heating For clothes resistant to heat, **OFF** (Check the lable on the article to be dried, to make sure it can Power off when the 20 be safely tumble dried) ,the timer knob in heater is working. According to 'OFF' position. clothes materials and 80 The dryer starts quantity, turn the timer knob when turn the knob to relative position. Select 220 100 clockwise. 'Strong Dry' for clothes particularly thick and in large 120 quantities. Refer to 'Dry Time Reference Table'.

#### Dry Time Reference Table

| Dry C                | apacity      | Approx.1kg   | Approx.2kg    | Approx.3.5kg         | Approx.5.0kg         |
|----------------------|--------------|--------------|---------------|----------------------|----------------------|
| Dry time Strong Soft | Approx.50min | Approx.90min | Approx.160min | Approx.200min        |                      |
|                      | Soft         | Approx.90min | Approx.150min | Suggest use 'strong' | Suggest use 'strong' |

Dry time affected by many factors, such as material, weight, thickness and the hydrated ratio of clothes, the above listed dry time is only for reference.

### **Using Method**

## 4. Set 'heat selector knob' to select 'Strong dry' or 'Soft dry' level.

- 'Strong dry' level for large quantity and low room temperature.
- 'Soft dry' for nonheat-resistant clothes.




Soft Strong

Heat selector knob

#### 5. Dry time settings

- Select dry program according to clothes materials and quantity, turn the timer knob to relative position. The dryer starts running.
- Please refer to page 7 'Control panel and its functions'.
- Caution: Dry timing knob cursor shouldn't be set at the blank area, as indicated in the right figure.




### 6. Do not take the laundry out until drying process is done

- The last 20 minutes of hot air drying is cooling to reduce the temperature of laundry inside the drum.
- To take the laundry out during drying, please run cooling operation first since the temperature inside the drum must be high.
- Static electricity, due to friction, will be generated on clothes made of chemical fibre after dried. You can feel it when taking them out, which is normal and shall not to be worried about.



### 7. Unplug the power cord

 Please hold plug to unplug power cord from a receptacle. Do not pull electrical wire directly to prevent internal breakage or bad connection.



#### 8. Clean filters

Refer to the instructions on page 9.


### Care And Cleaning

- Clean the buildup such as lints on filters in time after each use, otherwise it will affect the performance of your dryer.
- Please unplug the power cord first when cleaning it.

#### Cleaning of filters

- The lint filter must be used for drying.
- It must be cleaned in time befor and after each use.
- 1. Remove the filters

Remove by pulling straight up with hands inserted into the four holes around the exhaust vent shroud in the sequence of 'Exhaust vent shroud - Lint filter -Exhaust filter'.(as shown in figure 1)



The filter fixed in the

bottom of the drum



Lint Filter

Figure 1

**Dust Cleaner** Figure 2

2. Clean the lints


Separate 'exhaust vent shroud'.'lint filter' and 'exhaust filter' and clean the lints on the filter and exhaust filter. with a soft brush or vacuum cleaner. Can also clean the filters with water.

Do not damage the filters. (as shown in figure 2)



After cleaning, assemble in the sequence of 'exhaust filter -filter-exhaust vent shroud', align the recesses in the center of filter with the projection in the center of drum and make sure that it is firmly inserted (as shown in figure 3)


Note: The filter fixed in the bottom of the drum shall also be cleaned with a soft brush.(as shown in figure 1)



Exhaust Filter

#### Clean the interior drum or dryer housing, with wetsoft cloth, ifstained.

- Do not wash directly with water.
- Do not use thinner, gasolene or alcohol.
- Do not use any type of spray cleaner when cleaning the interior. Hazardous fumes or electric shock could occur. If dryer drum becomes stained, clean the drum with a damp cloth. Remove any residue before drying the next load. Clean cabinet with mild soap and water. Donot use







## **Trouble Shooting**

(If your dryer exhibits problems, please unplug the power cord before checking) The following maybe unrelated to a malfunction of the dryer itself, please reconfirm before calling a serviceman. If it does relate to a malfunction, please contact our service agent or after-sales service and do not repair it by yourself.

| Problem  | Possible Cause  | What to do  |
|--|---|---|
| Timer knob does not turn   | <ul><li>Is the power cord inserted firmly?</li></ul>                                    | Insert the power cord firmly                                |
| Drum does not turn   | • Is the door closed?   | Close the door.   |
|  | • Is the power cord inserted?   | Insert the power cord firmly.                               |
|  | <ul><li>Does the receptacle have<br/>power?</li></ul>                                   | Check the power cord receptacle.                            |
| No hot airblown out  | <ul><li>Is the timer incorrectly<br/>set up in cold air?</li></ul>                      | Set to hot air  |
| The laundry is not<br>throughly dried<br>(some of the clothes<br>still wet after dryer<br>stops) | • Is the back filter clogged?   | Clean the filter.   |
|  | <ul> <li>Have the clothes<br/>been fully dehydrated?</li> </ul>                         | Dehydrate the laundry completely.                           |
|  | Is the laundry too much?  | Reduce the laundry quantity.                                |
|  | <ul> <li>Have the dryer have been added during operation?</li> </ul>                    | Dry the undried laundry again.                              |
|  | Does the laundry twist?   | Loose the twisted laundry and dry again.                    |
|  | <ul> <li>Have any clothes dry easily<br/>and hardly been dried<br/>together?</li> </ul> | Dry the undried laundry again.                              |
|  | Is the dryer placed in a small<br>and badly-vented space?                               | <ul> <li>Place the dryer in a well-vented place.</li> </ul> |
| Dryer does not start   | • Is power failure?   | Try again after power recovered                             |
|  | <ul><li>Is the power cord inserted firmly?</li></ul>                                    | ● Insert the power cord firmly                              |
|  | • Is the door closed?   | Close the door  |
|  | • Is the timer in OFF position?   | Set dry time  |